

EFR 6258-A

225-450 HP Turbo



EFR 6258-G

225-450 HP Turbo



F E A T U R E S

- Gamma-Ti turbine wheel
- Integrated Compressor Recirculation Valve (CRV)
- Dual ceramic ball bearing assembly with metal cage
- Boost Control Solenoid Valve (BCSV)
- Forged Milled Compressor Wheel (FMW)
- Extended tip technology
- Compressor cover with speed sensor mounting provisions

Product - (TYPE)	Complete Turbo	Bearing Housing Material	Super-Core**	TURBINE HOUSING				
				Assembly	A/R	Inlet	Scroll	Waste-gate
6258-A	179150	Iron	179140	11581009006	0.64	T25	Single	Yes
6258-F	-	-	-	11581008000	0.85	T25	Single	Yes
6258-F(v)	-	-	-	11581008001	0.85	V-Band	Single	Yes
6258-G	11589880036	Aluminum*	11587105002	11581008002	0.80	T4	Dual	Yes
6258-I	-	-	-	11581008003	0.85	V-Band	Single	No
6258	-	Iron	11587105002	-	-	-	-	-
6258	-	Aluminum*	179140	-	-	-	-	-


Turbo Frame Size	B1
Comp. Wheel Inducer Dia. (mm)	49
Comp. Wheel Outer Dia. (mm)	62
Turbine Wheel Exducer Dia. (mm)	51
Turbine Wheel Outer Dia. (mm)	58

*Aluminum bearing housings require cooling

**The following components are not included as part of the Super-Core: Turbine Housing, Clamp Plate Hardware, Wastegate, and Actuator

COMPRESSOR MAP / APPLICABLE TO ALL 6258 UNITS

Comp. Wheel Inducer Dia. (mm) 49
Comp. Wheel Outer Dia. (mm) 62

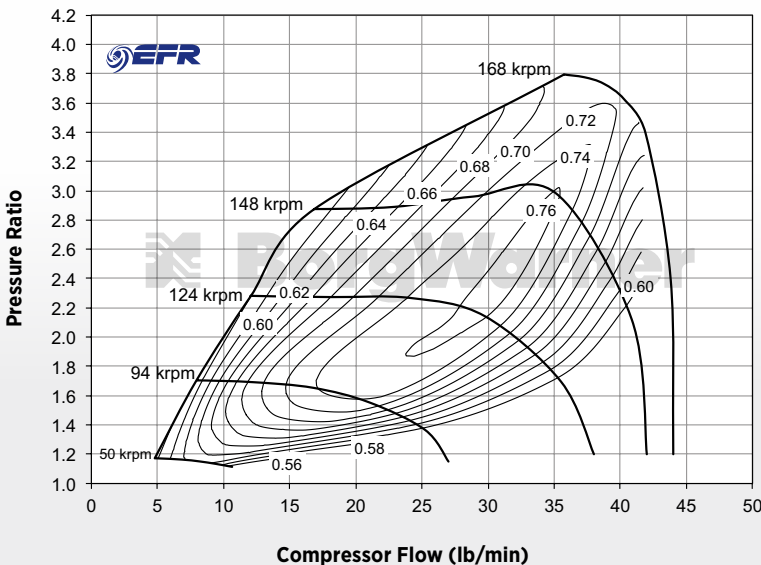

OPTIONAL HARDWARE

See page 37 for: Speed Sensor, Turbine Gaskets & V-Bands, Oil Drain Gasket & Fitting, Actuators & Brackets



Compressor Cover SX-E Style	Compressor Cover with 90° Outlet	I-Type Turbine Housing
11621013032	11621003002	11581008003

SEE PAGE 34 FOR FRAME DIMENSIONS

SEE PAGE 61 FOR SPEED SENSOR INSTALLATION DETAILS